

Sliding Mode controller for Self-Excited Induction Generator

L. Louze, A. L. Nemmour, A. Khezzar and M. Boucherma
 Laboratoire d'Electrotechnique de Constantine "LEC"
 Mentouri University, Constantine 25000, Algeria
 E-mail: louze_lamri@yahoo.fr

Abstract. This paper presents a simple control structure based on the sliding mode algorithm for an isolated-loaded induction generator (IG). The machine delivers an active power to a dc-load via a converter connected to a single capacitor on the dc side. Since the converter/capacitor model is nonlinear, the sliding mode technique constitutes a powerful tool to ensure the dc-bus voltage regulation. The computer simulations are provided to verify the validity of the proposed control algorithm.

Key words

Induction generator, Sliding mode control, DC voltage control.

1. Introduction

The use of induction generators is becoming more and more popular for renewable energy sources, especially for wind electric systems, both in grid connected and stand alone mode. It is well known that the induction generator can operate in self-excited mode using only the input mechanical power from the rotating prime mover and a source of reactive power. The reactive power can be supplied by a variety of methods, from simple capacitors to complex power conversion systems.

Owing to its many advantages, the self excited induction generator has emerged from among the well known generators as a suitable candidate to be driven by wind turbine. Some of its advantages are small size and weight, robust construction, absence of separate source for excitation and reduced maintenance cost. When the induction generator is connected to an infinite power net, the analysis becomes simple, since the voltage and frequency are determined by the driving network. However, an autonomous induction machine is able to generate electric power only if self excitation occurs [1-3], and it can be sustained. The main drawback of such generators however is its inherently poor voltage regulation, and it becomes necessary to have an appropriate voltage regulating scheme.

To overcome poor voltage regulation of the SEIG, a number of schemes have been proposed. The scheme based on switched capacitors, this scheme finds limited application because it regulates the terminal voltage in discrete steps [4-5].

A saturable reactor scheme of voltage regulation involves potentially large size and weight due to the necessity of a large saturating inductor [6-7].

In the short shunt and long shunt configuration, the series capacitor used causes the problem of resonance while supplying power to an inductive load [8-9].

The problems associated with schemes discussed above can be solved by applying nonlinear control to an inverter/rectifier system with a single DC capacitor on the DC link.

In this paper, a review of sliding mode control associated to the flux oriented control technique is applied to a self-excited induction generator. The vector control strategy is employed in order to reduce SEIG mathematical model complexity. The induction generator rotor flux is controlled by the d-axis stator current and the q-axis stator current controls the delivering active stator power.

2. Induction Generator Model

The state space model of induction generator in the synchronously rotating reference frame d and q axes are [10,11]:

$$\begin{cases} \frac{di_{sd}}{dt} = -\alpha_1 i_{sd} + \omega_s i_{sq} + \alpha_2 \varphi_{rd} + \omega_m \alpha_3 \varphi_{rq} - \alpha_4 V_{sd} \\ \frac{di_{sq}}{dt} = -\omega_s i_{sd} - \alpha_1 i_{sq} - \omega_m \alpha_3 \varphi_{rd} + \alpha_2 \varphi_{rq} - \alpha_4 V_{sq} \\ \frac{d\varphi_{rd}}{dt} = \frac{M}{\tau_r} i_{sd} - \frac{1}{\tau_r} \varphi_{rd} + (\omega_s - \omega_m) \varphi_{rq} \\ \frac{d\varphi_{rq}}{dt} = \frac{M}{\tau_r} i_{sq} - \frac{1}{\tau_r} \varphi_{rq} - (\omega_s - \omega_m) \varphi_{rd} \end{cases} \quad (1)$$

Where:

$$\alpha_1 = \frac{1}{\sigma \tau_s} + \frac{1-\sigma}{\sigma \tau_r}, \quad \alpha_2 = \frac{1-\sigma}{M \sigma \tau_r}, \quad \alpha_3 = \frac{1-\sigma}{M \sigma}, \quad \text{and} \\ \alpha_4 = \frac{1}{\sigma L_s}.$$

$$\text{With: } \tau_s = \frac{L_s}{R_s} \text{ and } \tau_r = \frac{L_r}{R_r}.$$

And the model of the PWM converter is:

$$\begin{cases} V_{sd} = \frac{1}{2} S_d V_{dc} \\ V_{sq} = \frac{1}{2} S_q V_{dc} \end{cases} \quad (2)$$

$$C \frac{dV_{dc}}{dt} = \frac{1}{2} (S_d i_{sd} + S_q i_{sq}) - \frac{V_{dc}}{R} \quad (3)$$

Where S_d and S_q are the Park's transformation of the switching functions S_a, S_b and S_c for the PWM technique and their state is defined by the following function:

$$S_k = \begin{cases} +1, & \bar{S}_k = -1 \\ -1, & \bar{S}_k = +1 \end{cases} \quad \text{for } k=a,b,c$$

When the induction generator is operated under the vector control conditions, the rotor flux estimator can be expressed as ($\varphi_{rd} = \varphi_r$ and $\varphi_{rq} = 0$):

$$\frac{d\varphi_r}{dt} = \frac{M}{\tau_r} i_{sd} - \frac{1}{\tau_r} \varphi_r \quad (4)$$

And the synchronous frame velocity is given by:

$$\omega_s = \omega + \frac{M}{\tau_r} \frac{i_{sd}}{\varphi_r} \quad (5)$$

The variables to be controlled are the rotor flux φ_r and the DC voltage V_{dc} in the DC side.

3. Cascade Sliding Mode Control

A. General concept

The variable structure system and their associated sliding regimes are characterized by a discontinuous nature of the control action with which a desired dynamic of the system is obtained by choosing appropriate sliding surfaces. The control actions provide the switching between subsystems which give a desired behavior of the closed loop system [10], [12-16].

The general form of sliding surface which guarantees the convergence of the state x to its reference x^* is given as follows:

$$S(x) = \left(\frac{d}{dt} + \lambda \right)^{r-1} (x^* - x) \quad (6)$$

Where r is the degree of the sliding surface and λ is a strictly positive constant.

It is the first convergence condition which permits dynamic system to converge to wards the sliding surfaces. It is a question of formulating a positive scalar function $V(x) > 0$ for the system states variables which are defined by the following Lyapunov function:

$$V(x) = \frac{1}{2} S^2(x) \quad (7)$$

To cause the Lyapunov function decreases, it is necessary to ensure that its derivative is negative. This is checked if:

$$\dot{S}(x) S(x) < 0 \quad (8)$$

Now, to define the control algorithm for the induction generator, it contains two terms, first for the exact linearization, the second discontinuous one for the system stability.

$$U_c = U_{eq} + U_n \quad (9)$$

- U_{eq} is calculated starting from the expression $\dot{S}(x) = 0$
- U_n is given to guarantee the attractivity of the variable to be controlled towards the commutation surface.

To find the control expression U_c , let us consider a class of nonlinear system described by the following equation:

$$\dot{x} = f(x) + gU_c \quad (10)$$

Where:

x state vector,
 U_c control inputs,
 f, g smooth vector fields,

Therefore:

$$\dot{S}(x) = \frac{\partial S}{\partial t} = \frac{\partial S}{\partial x} \frac{\partial x}{\partial t} \quad (11)$$

We substitute (9) and (10) into (11), we get:

$$\dot{S}(x) = \frac{\partial S}{\partial x} (f(x) + gU_{eq}) + \frac{\partial S}{\partial x} gU_n \quad (12)$$

When the sliding mode is reached the surface is cancelled and consequently its derivative also $\dot{S} = 0$

Therefore the equivalent control U_{eq} can be written as:

$$U_{eq} = - \left(\frac{\partial S}{\partial x} g \right)^{-1} \frac{\partial S}{\partial x} f(x) \quad (13)$$

By replacing U_{eq} in (12), we obtain:

$$\dot{S}(x) = \frac{\partial S}{\partial x} gU_n \quad (14)$$

And the attractivity condition expressed by (8) becomes:

$$S(x) \frac{\partial S}{\partial x} gU_n \quad (15)$$

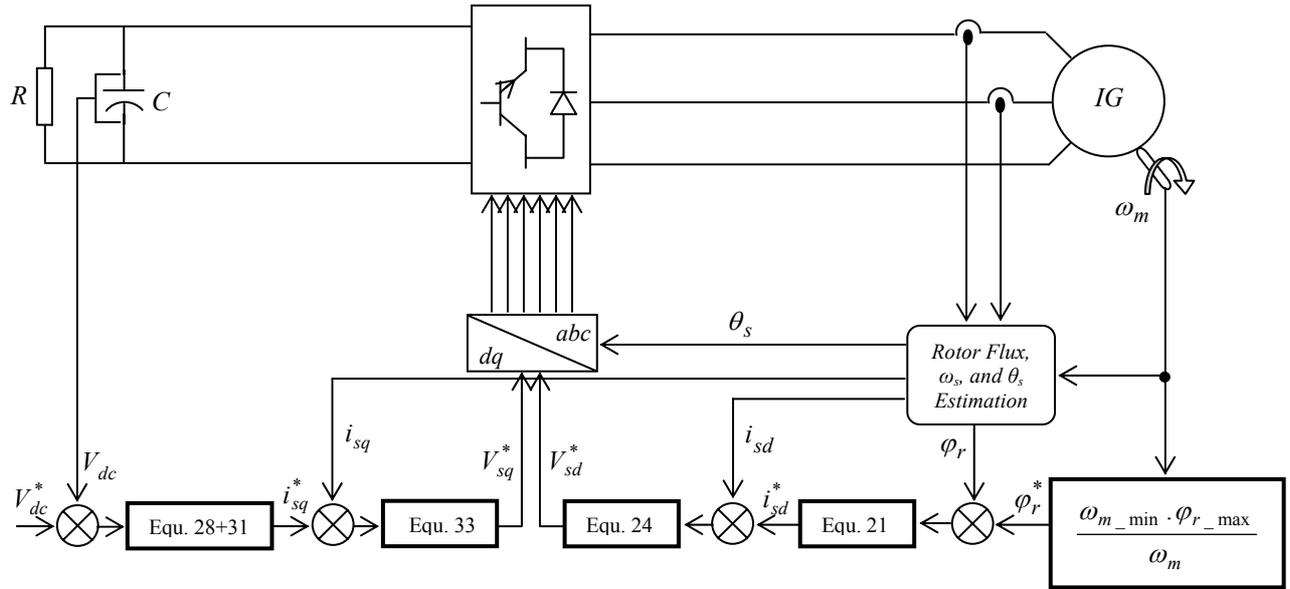


Fig. 1. Control structure proposed

In order to satisfy this condition, the sign of U_n must be opposed to the one of $S(x) \frac{\partial S}{\partial x} g$.

The simplest equation is the form of relay:

$$U_n = k \text{sign}(S) \quad (16)$$

B. Application to the SEIG control

In this study, the sliding mode theory is applied to the rotor field oriented induction generator model, in such a way as to obtain simple surfaces. The proposed Self-Excited Induction Generator SEIG control scheme is shown in Fig. 4. It consists of an SEIG, a three phase converter connected to the IG terminals, a DC link voltage and finally a DC load in the DC side converter.

For the IG sliding mode controllers design, four switching surfaces are chosen as:

$$\begin{cases} S_1(\varphi_r) = \varphi_r - \varphi_r^* \\ S_2(i_{sd}) = i_{sd} - i_{sd}^* \\ S_3(V_{dc}) = V_{dc} - V_{dc}^* \\ S_4(i_{sq}) = i_{sq} - i_{sq}^* \end{cases} \quad (17)$$

In order that $S \rightarrow 0$ in finite time, the control law is designed such that:

$$\begin{bmatrix} \dot{S}_1 \\ \dot{S}_2 \\ \dot{S}_3 \\ \dot{S}_4 \end{bmatrix} = - \begin{bmatrix} k_1 \text{sign}(S_1) \\ k_2 \text{sign}(S_2) \\ k_3 \text{sign}(S_3) \\ k_4 \text{sign}(S_4) \end{bmatrix} \quad (18)$$

We have:

$$\dot{S}_1 = \dot{\varphi}_r - \dot{\varphi}_r^* \quad (19)$$

Eqs 4. and 19 yield:

$$\frac{M}{\tau_r} i_{sd} - \frac{1}{\tau_r} \varphi_r = -k_1 \text{sign}(S_1) \quad (20)$$

The direct stator current set value is deduced as:

$$i_{sd}^* = \frac{\tau_r}{M} \left(-k_1 \text{sign}(S_1) + \frac{1}{\tau_r} \varphi_r \right) \quad (21)$$

With the same manner, the direct stator current surface derivative is:

$$\dot{S}_2 = \dot{i}_{sd} - \dot{i}_{sd}^* \quad (22)$$

So:

$$-\alpha_1 i_{sd} + \omega_s i_{sq} + \alpha_2 \varphi_{rd} - \alpha_4 V_{sd} - \dot{i}_{sd}^* = -k_2 \text{sign}(S_2) \quad (23)$$

Taking into account the Eqs. 1 and 20, we obtain:

$$V_{sd}^* = \frac{1}{\alpha_4} \left(k_2 \text{sign}(S_2) - \alpha_1 i_{sd} + \omega_s i_{sq} + \alpha_2 \varphi_r - \dot{i}_{sd}^* \right) \quad (24)$$

The best way to calculate the V_{dc} area is to put it into the following form:

$$P^* = V_{dc} I_{dc} = V_{dc} \left(C \frac{dV_{dc}}{dt} + \frac{V_{dc}}{R} \right) \quad (25)$$

Therefore:

$$\frac{dV_{dc}}{dt} = \frac{1}{CV_{dc}} \left(P^* - \frac{V_{dc}^2}{R} \right) \quad (26)$$

The surface of DC voltage is given by:

$$\dot{S}_3 = \dot{V}_{dc} - \dot{V}_{dc}^* \quad (27)$$

Eqs 18. and 26 give:

$$P^* = \frac{V_{dc}^2}{R} - CV_{dc}k_3 \text{sign}(S_3) \quad (28)$$

When losses are not taken into account, the electromagnetic torque will be given by:

$$T_{em} = \frac{P^*}{\Omega} \quad (29)$$

Since:

$$T_{em} = p \frac{M}{L_r} \phi_r i_{sq} \quad (30)$$

Then:

$$i_{sq}^* = \frac{L_r}{\omega M} \frac{P^*}{\phi_r} \quad (31)$$

Finally, the surface of i_{sq} is given by:

$$\dot{S}_4 = \dot{i}_{sq} - \dot{i}_{sq}^* \quad (32)$$

Taking into account the Eqs. 1, 18 and 32, the quadrature stator voltage component reference value is computed as:

$$V_{sq}^* = \frac{1}{\alpha_4} \left(k_4 \text{sign}(S_4) - \omega_s i_{sd} - \alpha_1 i_{sq} - \omega_m \alpha_3 \phi_r - \dot{i}_{sq}^* \right) \quad (33)$$

The reference rotor flux linkage required at any speed is calculated based on this maximum flux linkage, which corresponds to the minimum rotor speed. Hence at any rotor speed the reference rotor flux linkage is given by equation (34) and graphically its variation with rotor speed is shown in Fig. 2.[17]:

$$\phi_r^* = \frac{\omega_{\min} \phi_{r \max}}{\omega} \quad (34)$$

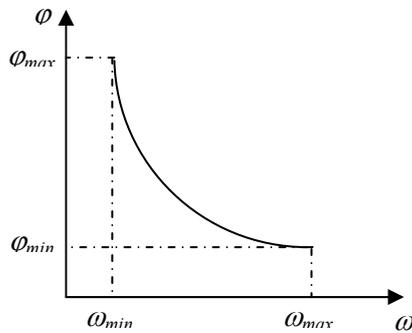


Fig. 2. Relationship between rotor speed and rotor flux linkage.

4. Simulation Results

The proposed control has been simulated for an induction machine with the following parameters (1.5 kW, $\cos\phi=0.8$, 4 poles, 220V (rms), whose per-phase equivalent circuit constants are:

$$L_s=L_r=0.274H, M=0.258H, R_s=4.85 \Omega \text{ and } R_r=3.805 \Omega.$$

The DC voltage regulation is obtained using the proposed algorithm controller in spite of the presence of disturbances such as step changing of the resistive load and the mechanical speed (when the SEIG is driven by a wind turbine for example). Fig. 3. shows a no-load operation flowed-up by a step changing of the resistive load (250Ω) introduced at $t=0.6s$ when the DC-bus voltage is set to 600V. A rapid response is obtained and the introduced perturbation is immediately rejected by the control system.

We also showed in Fig. 4. the variation in d-axis, q-axis stator currents and electromagnetic torque in the rotating reference frame.

Fig. 5. shows the stator current and the build up of generated voltage at the terminals of the induction generator.

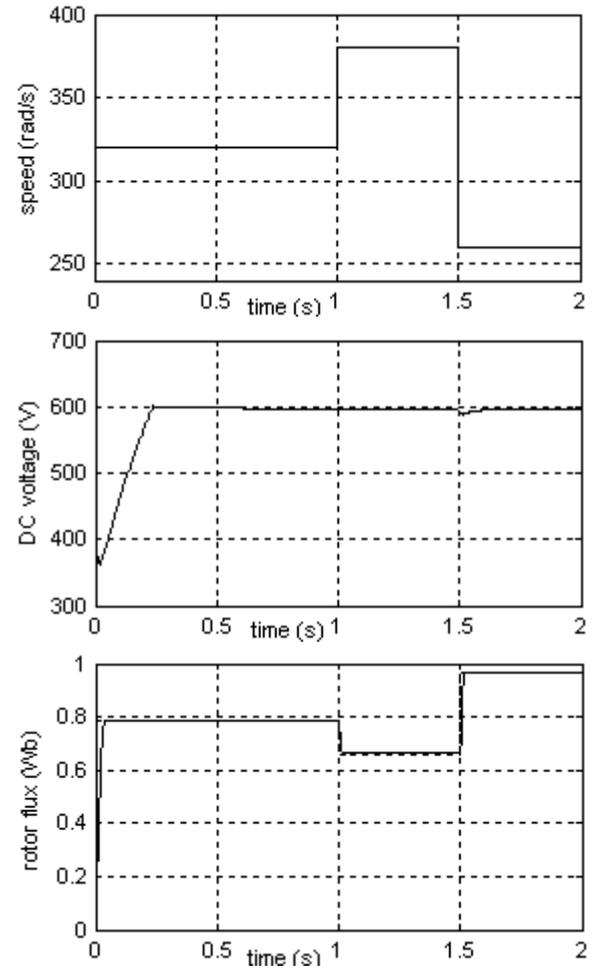


Fig. 3. DC voltage and rotor flux variation with speed and load variation

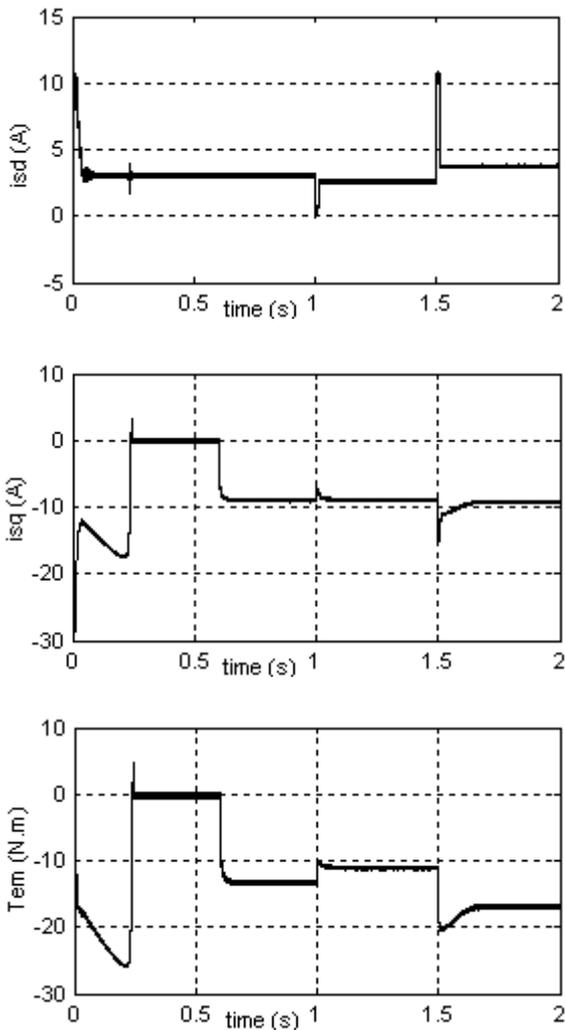


Fig. 4. Dynamics of the SEIG during startup and load variation at 0.6 s

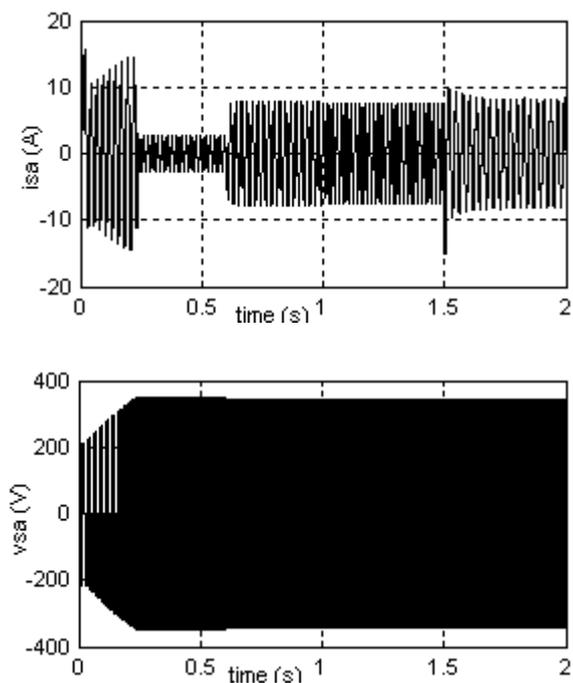


Fig. 5. Generated current and voltage at the terminals of induction generator with load variation at 0.6 s

5. Conclusion

A variable speed system conversion using a SEIG with a PWM inverter is proposed. Stable and independent control of the SEIG rotor flux estimated and the DC-bus voltage by applying the nonlinear sliding mode control is demonstrated. In spite of taking in the account all the system parameters effects, the sliding mode control provides a good dynamic performances of the global SEIG conversion system.

References

- [1] A.K. Al Jabri, A.I. Alolah, "Capacitance requirement for isolated self-excited induction generator," IEE PROCEEDINGS, Vol. 137, Pt. E, No. 3, pp. 154-159, May 1990.
- [2] T.F. CHan, "Capacitance requirements of self-excited induction generators," IEEE Transactions on Energy Conversion, Vol. 8, No. 2, pp. 304-311, June 1993.
- [3] R. J. Harrington, F. M. M. Bassiouny, "New approach to determine the critical capacitance for self-excited induction generators," IEEE Transactions on Energy Conversion, Vol. 13, No. 3, pp. 244-249, September 1998.
- [4] M. A. Elsharkawi, S. S. Venkata, T. J. Williams, and N. G. Butlar, "An adaptive power factor controller for three-phase induction generators," IEEE Trans. Power App. Syst., vol. PAS-104, No. 7, pp. 1825-1831, Jul. 1985.
- [5] N. H. Malik, and A. H. Al-Bahrani, "Influence of the Terminal Capacitor on the Performance Characteristics of a Self-Excited Induction Generator," IEE Proc C., Vol. 137, No. 2, pp. 168-173, March 1990.
- [6] de Resende, José T.; Schelb, Antônio J.H.C.; Ferreira, Robson; Júnior, Manassés E. P., "Control of the Generated Voltage by a Three-phase Induction Generator Self-excited by Capacitors using Control Techniques," International Conference on Industrial Technology, Vol. 1, pp. 530-535, 10-12 Dec. 2003.
- [7] T. Ahmed, K. Nishida, K. Soushin and M. Nakaoka, "Static VAR compensator-based voltage control implementation of single-phase self-excited induction generator," IEE Proc.-Gener. Transm. Distrib., Vol. 152, No. 2, March 2005, pp. 145-156.
- [8] L. Shridhar, B. Singh, and C. S. Jha, "Transient performance of the self regulated short-shunt self-excited induction generator," IEEE Trans. Energy Convers., vol. 10, No. 2, pp. 261-267, Jun 1995.
- [9] O. Ojo, "Performance of self-excited single-phase induction generators with shunt, short-shunt and long-shunt excitation connections," IEEE Trans. Energy Conversion, vol. 11, No. 3, pp. 477-482, September 1996.
- [10] D. T. H. Tham and D. H. Nghia, "Sliding mode control of induction motor," International Symposium on Electrical & Electronics Engineering 2007, HCM City, Vietnam, pp. 42-47, October 2007.
- [11] K. Idjdarene, D. Rekioua, T. Rekioua and A. Tounsi, "Control strategies for an autonomous induction generator taking the saturation effect into

- account,” European Conference on Power Electronics and Applications, pp. 1-10, 2-5 Sept. 2007.
- [12] D. C. Lee, G. M. Lee and K. D. Lee, “DC-Bus Voltage Control of Three-Phase AC/DC PWM Converters Using Feedback Linearization,” IEEE Transactions on Industry Applications, Vol. 36, No. 3, pp. 826-833, May/June 2000.
- [13] A. Massoum, M. K. Fellah, A. Meroufel and A. Bendaoud, “Input output linearization and sliding mode control of a permanent magnet synchronous machine fed by a three levels inverter,” Journal of Electrical Engineering, Vol. 57, No. 4, pp. 205-210, 2006.
- [14] R. Abdessemed, A. L. Nemmour and V. F. Tomachevitch, “Cascade sliding mode control of a stator field oriented double fed induction motor drive,” Archives of Electrical Engineering, Vol. LI, No. 4, pp. 371-387, 2002.
- [15] M. R. Fbarzadeh, G. Faezian, H. Tabatabaei, N.Sargolzael, “A New Variable Structure Control Methodology for Electrical/Mechanical Parameter Estimation of Induction Motor,” Proceedings of the American Control Conference, Denver, Colorado 2003.
- [16] B. Boukezzar and M. M'Saad, “Robust sliding mode control of a DFIG variable speed wind turbine for power production optimization,” 16th Mediterranean Conference on Control and Automation Congress Centre, Ajaccio, France, pp. 795-800, June 25-27, 2008.
- [17] D. Seyoum, M. F. Rahman and C. Grantham, “Inverter supplied voltage control system for an isolated induction generator driven by a wind turbine,” 38th IAS Annual Meeting. Conference Record of the Industry Applications, Vol. 1, pp. 568-575, 12-16 Oct. 2003.